


- Carrier tape packaging machine for manual or automatic applications


Am Pestalozzing 24
D-91058 Erlangen

Phone.: 49 9131 7700-0
Fax: 49 9131 7700-10
eMail: info@ertec.com
Internet: www.ertec.com

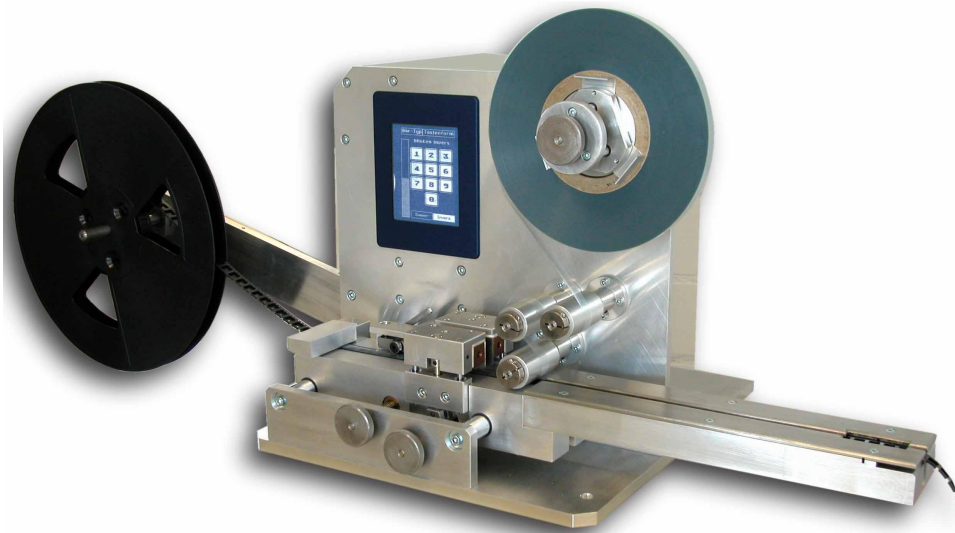

Details

- Easy to adjust to tape widths from 8 mm up to 52 mm
- Pitch, heat temperature and press time free adjustable
- Double heat station with exact temperature regulation
- Driven by electromotors, no air pressure needed
- Simple feed without spiked roller to prevent from any material damage
- Monitoring of cover tape, carrier tape and feeding/unfeeding roll
- Preset counter and counting control
- CFL-LCD-Display with touch panel for adjustments and messages
- Ergonomic support table to ease manual operation
- Available as OEM module to integrate in complex handling systems
- Dimensions:
approx.: 100 x 100 x 100 mm,
Weight: approx.: 25 kg

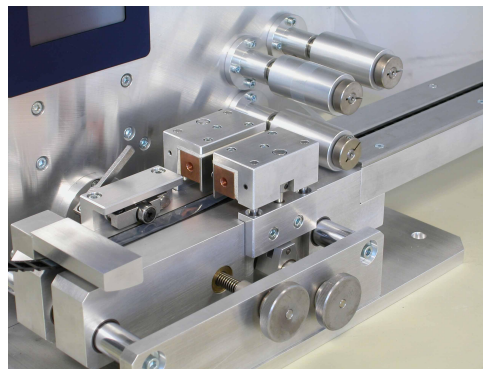

Control

- MC controller for machine, interaction and data transfer
- Embedded webserver for easy remote control via internet explorer
- PLC interface for direct integration into overlaying systems
- TCP/IP-Ethernet interface for integration into quality management
- RS232 interface for further peripherie (i.e. barcode reader)
- Connectors for foot switch, alarm signal, signal lamps, label printer
- Power supply: 230 VAC, convertible to 115 VAC

ertec

